




Roof Tiles

BRASTILE RECOMMENDED INSTALLATION GUIDE

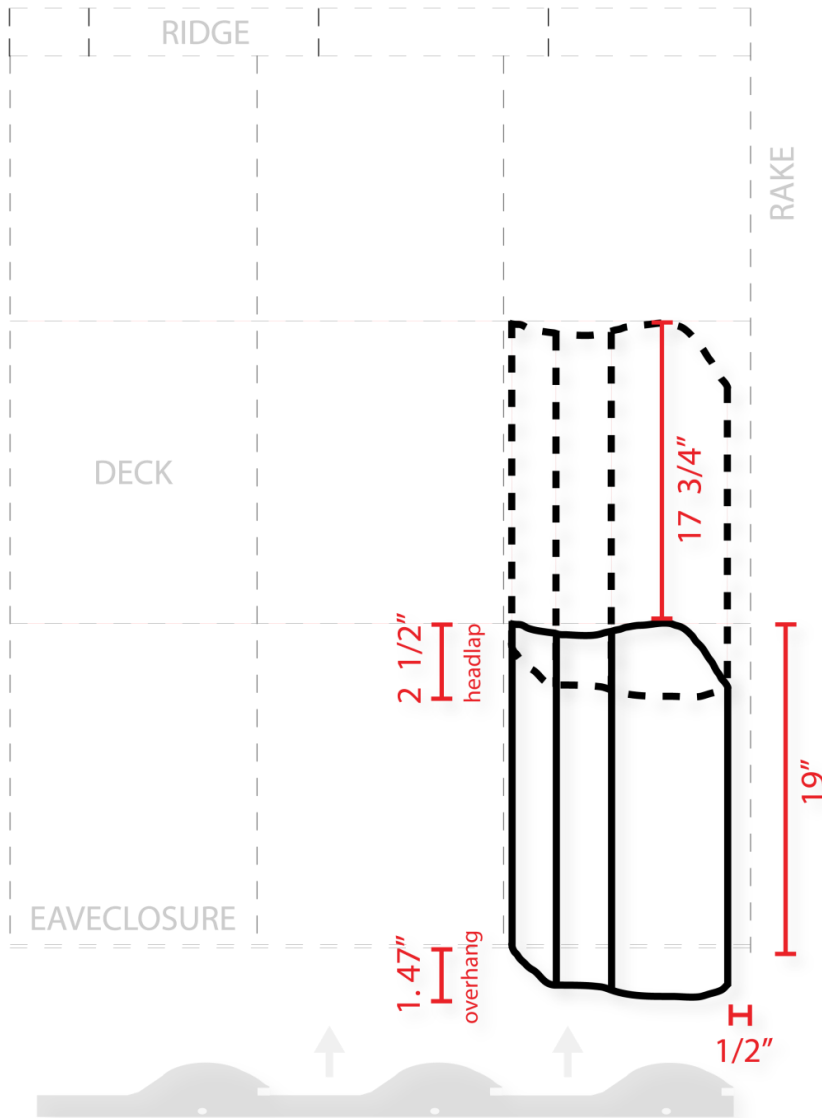


HORIZONTAL MARKETING LAYOUT

1 – Mark the 1st horizontal line at 19" from deck edge (eave closure) which will give you an overhang of 1.5".

2 – Mark the 2nd and all other horizontal lines at 17 3/4" from the 1st horizontal line, which should provide a 2 1/2" head lap.

*All measurements are approximate.

**Use Terracotagres eave closures for best vertical auto fixture.

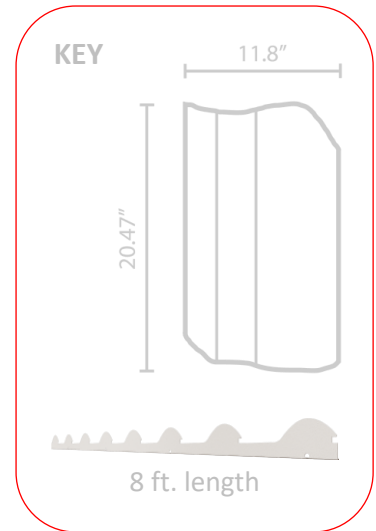

DISCLAIMER

It is important to recognize that these recommendations are neither warranty, explicit or implicit, nor representative of the only method by which Terracotagres Brastile roof tiles can be installed. Rather, they try to summarize for the designer, installer or developer good roofing practices and the requirements of various building code agencies. These guidelines may not be applicable in all geographical areas. It is the responsibility of those individuals who are referring to these guidelines to independently research and determine which is best for their particular project. Verify with your local authorities prior to installation.